

PR Series Cylindrical Type Proximity Sensor

Cylindrical type proximity sensor

■ Features

- Improved the noise resistance with dedicated IC
- Integrated surge protection circuit
- Integrated overload & short protection circuit (DC 2-wire, 3-wire type)
- Integrated reverse polarity protection circuit (DC 3-wire type)
- Long life cycle and high reliability, and simple operation
- Red LED status indication
- Protection structure IP67 (IEC standard)
- Replaceable for micro switches and limit switches

⚠ Please read "Caution for your safety" in operation manual before using.



■ Specifications

● DC 2-wire type

| Model | PRT08-1.5DO PRT08-1.5DC | PRT08-2DO PRT08-2DC | PRT12-2DO PRT12-2DC | PRT12-4DO PRT12-4DC | PRT18-5DO PRT18-5DC | PRT18-8DO PRT18-8DC | PRT30-10DO PRT30-10DC | PRT30-15DO PRT30-15DC |
|----------------------------------|--|------------------------|------------------------|------------------------|------------------------|------------------------|--------------------------|--------------------------|
| Sensing distance | 1.5mm | 2mm | 2mm | 4mm | 5mm | 8mm | 10mm | 15mm |
| Hysteresis | Max. 10% of sensing distance | | | | | | | |
| Standard sensing target | 8 × 8 × 1mm (Iron) | | 12 × 12 × 1mm (Iron) | | 18 × 18 × 1mm (Iron) | 25 × 25 × 1mm (Iron) | 30 × 30 × 1mm (Iron) | 45 × 45 × 1mm (Iron) |
| Setting distance | 0 to 1.05mm | 0 to 1.4mm | 0 to 1.4mm | 0 to 2.8mm | 0 to 3.5mm | 0 to 5.6mm | 0 to 7mm | 0 to 10.5mm |
| Power supply (Operation voltage) | 12-24VDC (10-30VDC) | | | | | | | |
| Leakage current | Max. 0.6mA | | | | | | | |
| Response frequency(*1) | 1.5kHz | 1kHz | 1.5kHz | 500Hz | | 350Hz | 400Hz | 200Hz |
| Residual voltage | Max. 3.5V | | | | | | | |
| Affection by Temp. | ±10% Max. for sensing distance at 20°C (For PRT08 series : ±20% Max.) | | | | | | | |
| Control output | 2 to 100mA | | | | | | | |
| Insulation resistance | Min. 50MΩ (at 500VDC megger) | | | | | | | |
| Dielectric strength | 1500VAC 50/60Hz for 1minute | | | | | | | |
| Vibration | 1mm amplitude at frequency of 10 to 55Hz in each of X, Y, Z directions for 2 hours | | | | | | | |
| Shock | 500m/s ² (50G) in X, Y, Z direction for 3 times | | | | | | | |
| Indicator | Output operation indicator (Red LED) | | | | | | | |
| Ambient temperature | -25 to 70°C (at non-freezing status) | | | | | | | |
| Storage temperature | -30 to 80°C (at non-freezing status) | | | | | | | |
| Ambient humidity | 35 to 95%RH | | | | | | | |
| Protection circuit | Surge protection circuit, Overload & Short protection circuit | | | | | | | |
| Protection | IP67 (IEC standard) | | | | | | | |
| Cable spec. | φ 3.5 × 2P, 2m | | φ 4 × 2P, 2m | | φ 5 × 2P, 2m | | | |
| Material | Case/Nut: Nikel plated Brass, Washer: Nikel plated Iron, Sensing surface: Heat-resistant ABS, Standard cable (Black): Polyvinyl chloride (PVC), Oil resistant cable (Gray): Oil resistant Polyvinyl chloride (PVC) | | | | | | | |
| Approval | CE | | | | | | | |
| Unit weight | Approx.36g | Approx.36g | Approx.63g | Approx.63g | Approx.122g | Approx.122g | Approx.181g | Approx.181g |

*(*1) The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

- (A) Photo electric sensor
- (B) Fiber optic sensor
- (C) Door/Area sensor
- (D) Proximity sensor**
- (E) Pressure sensor
- (F) Rotary encoder
- (G) Connector/Socket
- (H) Temp. controller
- (I) SSR/Power controller
- (J) Counter
- (K) Timer
- (L) Panel meter
- (M) Tacho/Speed/Pulse meter
- (N) Display unit
- (O) Sensor controller
- (P) Switching power supply
- (Q) Stepping motor & Driver & Controller
- (R) Graphic/Logic panel
- (S) Field network device
- (T) Production stoppage models & replacement

PR Series

●DC 3-wire type

| | | | | | | | | |
|----------------------------------|--|--|--|--|--|--|--|--|
| Model | PR08-1.5DN PR08-1.5DP PR08-1.5DN2 PR08-1.5DP2 PRL08-1.5DN PRL08-1.5DP PRL08-1.5DN2 PRL08-1.5DP2 | PR08-2DN PR08-2DP PR08-2DN2 PR08-2DP2 PRL08-2DN PRL08-2DP PRL08-2DN2 PRL08-2DP2 | PR12-2DN PR12-2DP PR12-2DN2 PR12-2DP2 PRS12-2DN PRS12-2DP PRS12-2DN2 PRS12-2DP2 | PR12-4DN PR12-4DP PR12-4DN2 PR12-4DP2 PRS12-4DN PRS12-4DP PRS12-4DN2 PRS12-4DP2 PRL12-4DN PRL12-4DP | PR18-5DN PR18-5DP PR18-5DN2 PR18-5DP2 PRL18-5DN PRL18-5DP PRL18-5DN2 PRL18-5DP2 | PR18-8DN PR18-8DP PR18-8DN2 PR18-8DP2 PRL18-8DN PRL18-8DP PRL18-8DN2 PRL18-8DP2 | PR30-10DN PR30-10DP PR30-10DN2 PR30-10DP2 PRL30-10DN PRL30-10DP PRL30-10DN2 PRL30-10DP2 | PR30-15DN PR30-15DP PR30-15DN2 PR30-15DP2 PRL30-15DN PRL30-15DP PRL30-15DN2 PRL30-15DP2 |
| Sensing distance | 1.5mm | 2mm | 2mm | 4mm | 5mm | 8mm | 10mm | 15mm |
| Hysteresis | Max. 10% of sensing distance | | | | | | | |
| Standard sensing target | 8×8×1mm(Iron) | | 12×12×1mm(Iron) | | 18×18×1mm(Iron) | 25×25×1mm(Iron) | 30×30×1mm(Iron) | 45×45×1mm(Iron) |
| Setting distance | 0 to 1.05mm | 0 to 1.4mm | 0 to 1.4mm | 0 to 2.8mm | 0 to 3.5mm | 0 to 5.6mm | 0 to 7mm | 0 to 10.5mm |
| Power supply (Operation voltage) | 12-24VDC (10-30VDC) | | | | | | | |
| Leakage current | Max. 10mA | | | | | | | |
| Response frequency(*1) | 1.5kHz | 1kHz | 1.5kHz | 500Hz | 350Hz | 400Hz | 200Hz | |
| Residual voltage | Max. 1.5V | | | | | | | |
| Affection by Temp. | ±10% Max. for sensing distance at 20°C within temperature range of -25 to 70°C, PR08 Series : Max. ±20% | | | | | | | |
| Control output | Max. 200mA | | | | | | | |
| Insulation resistance | Min. 50MΩ (at 500VDC megger) | | | | | | | |
| Dielectric strength | 1500VAC 50/60Hz for 1minute | | | | | | | |
| Vibration | 1mm amplitude at frequency of 10 to 55Hz in each of X, Y, Z directions for 2 hours | | | | | | | |
| Shock | 500m/s ² (50G) in X, Y, Z direction for 3 times | | | | | | | |
| Indicator | Output operation indicator (Red LED) | | | | | | | |
| Ambient temperature | -25 to 70°C (at non-freezing status) | | | | | | | |
| Storage temperature | -30 to 80°C (at non-freezing status) | | | | | | | |
| Ambient humidity | 35 to 95%RH | | | | | | | |
| Protection circuit | Surge protection circuit, Reverse polarity protection circuit, Overload & Short protection circuit | | | | | | | |
| Protection | IP67 (IEC standard) | | | | | | | |
| Material | Case/Nut: Nikel plated Brass, Washer: Nikel plated Iron, Sensing surface: Heat-resistant ABS, Standard cable (Black): Polyvinyl chloride (PVC), Oil resistant cable (Gray): Oil resistant Polyvinyl chloride (PVC) | | | | | | | |
| Cable spec. | φ 3.5×3P, 2m | | φ 4×3P, 2m | | φ 5×3P, 2m | | | |
| Approval | CE | | | | | | | |
| Unit weight | Approx. 36g | Approx. 36g | PR: Approx. 70g PRS: Approx. 68g | PR: Approx. 70g PRL: Approx. 68g | PR: Approx. 119g PRL: Approx. 150g | PR: Approx. 118g PRL: Approx. 150g | PR: Approx. 184g PRL: Approx. 222g | PR: Approx. 181g PRL: Approx. 227g |

※(*1) The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

●AC 2-wire type

| | | | | | | |
|----------------------------------|--|----------------------|--|--|--|--|
| Model | PR12-2AO PR12-2AC | PR12-4AO PR12-4AC | PR18-5AO PR18-5AC PRL18-5AO PRL18-5AC | PR18-8AO PR18-8AC PRL18-8AO PRL18-8AC | PR30-10AO PR30-10AC PRL30-10AO PRL30-10AC | PR30-15AO PR30-15AC PRL30-15AO PRL30-15AC |
| Sensing distance | 2mm | 4mm | 5mm | 8mm | 10mm | 15mm |
| Hysteresis | Max. 10% of sensing distance | | | | | |
| Standard sensing target | 12×12×1mm (Iron) | | 18×18×1mm (Iron) | 25×25×1mm (Iron) | 30×30×1mm (Iron) | 45×45×1mm (Iron) |
| Setting distance | 0 to 1.4mm | 0 to 2.8mm | 0 to 3.5mm | 0 to 5.6mm | 0 to 7mm | 0 to 10.5mm |
| Power supply (Operation voltage) | 100-240VAC (85-264VAC) | | | | | |
| Leakage current | Max. 2.5mA | | | | | |
| Response frequency(*1) | 20Hz | | | | | |
| Residual voltage | Max. 10V | | | | | |
| Affection by Temp. | ±10% Max. for sensing distance at 20°C within temperature range of -25 to 70°C | | | | | |
| Control output | 5 to 150mA | | | 5 to 200mA | | |
| Insulation resistance | Min. 50MΩ (at 500VDC megger) | | | | | |
| Dielectric strength | 2500VAC 50/60Hz for 1minute | | | | | |
| Vibration | 1mm amplitude at frequency of 10 to 55Hz in each of X, Y, Z directions for 2 hours | | | | | |
| Shock | 500m/s ² (50G) in X, Y, Z direction for 3 times | | | | | |
| Indicator | Operation indicator (Red LED) | | | | | |
| Ambient temperature | -25 to 70°C (at non-freezing status) | | | | | |
| Storage temperature | -30 to 80°C (at non-freezing status) | | | | | |
| Ambient humidity | 35 to 95%RH | | | | | |
| Protection circuit | Surge protection circuit | | | | | |
| Protection | IP67 (IEC standard) | | | | | |
| Cable spec. | φ 4×2P, 2m | | | φ 5×2P, 2m | | |
| Material | Case/Nut: Nikel plated Brass, Washer: Nikel plated Iron, Sensing surface: Heat-resistant ABS, Standard cable (Black): Polyvinyl chloride (PVC) | | | | | |
| Approval | CE | | | | | |
| Unit weight | Approx. 66g | Approx. 66g | PR : Approx. 130g PRL : Approx. 150g | PR : Approx. 130g PRL : Approx. 150g | PR : Approx. 185g PRL : Approx. 224g | PR : Approx. 117g PRL : Approx. 222g |

※(*1) The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.


Cylindrical Type Proximity Sensor

Dimensions


(Unit:mm)

| | |
|-----|--|
| (A) | Photo electric sensor |
| (B) | Fiber optic sensor |
| (C) | Door/Area sensor |
| (D) | Proximity sensor |
| (E) | Pressure sensor |
| (F) | Rotary encoder |
| (G) | Connector/Socket |
| (H) | Temp. controller |
| (I) | SSR/Power controller |
| (J) | Counter |
| (K) | Timer |
| (L) | Panel meter |
| (M) | Tacho/Speed/Pulse meter |
| (N) | Display unit |
| (O) | Sensor controller |
| (P) | Switching power supply |
| (Q) | Stepping motor & Driver & Controller |
| (R) | Graphic/Logic panel |
| (S) | Field network device |
| (T) | Production stoppage models & replacement |


●PR(T)08-1.5D□

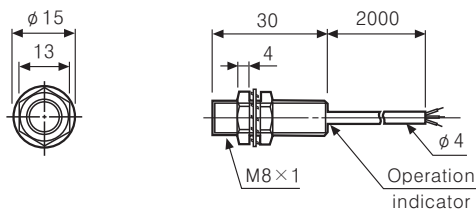


●PR(T)08-2D□

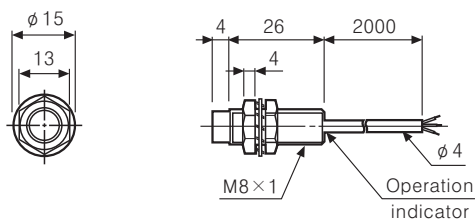


●PR(T)18-5D□

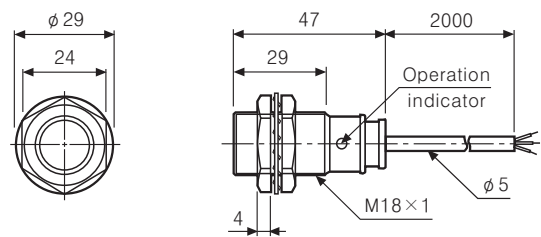


●PR(T)18-8D□

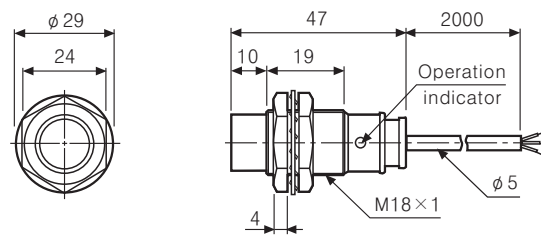


●PRS12-2D□

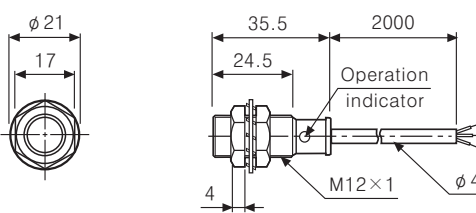


●PRS12-4D□

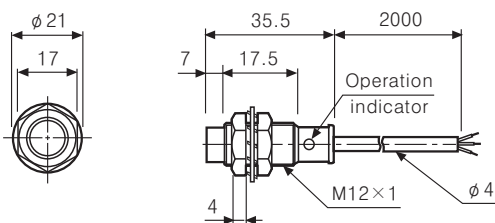


●PR(T)30-10D□

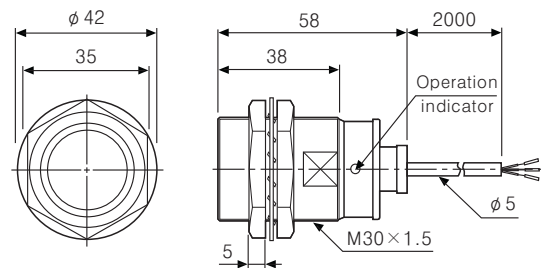


●PR(T)30-15D□

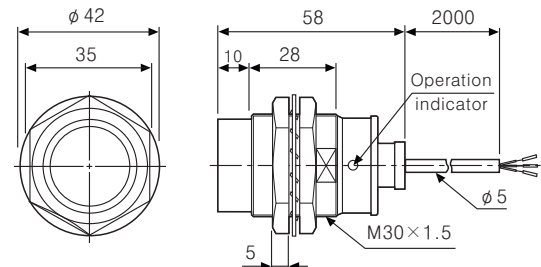


●PR(T)12-2D□

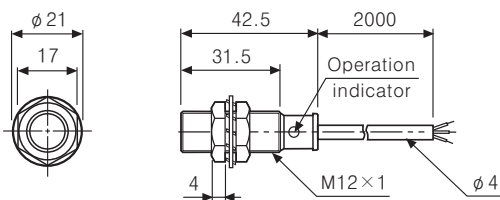


●PR(T)12-4D□

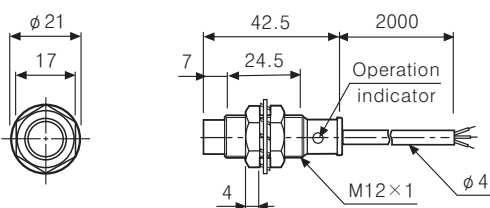

●PRL08-1.5D□

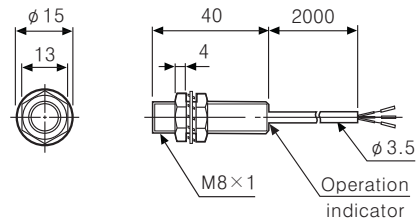

●PRL08-2D□

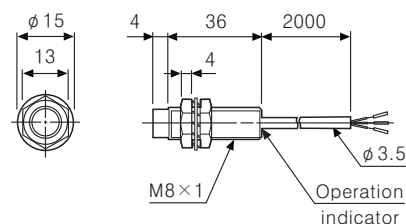


PR Series


Dimensions

(Unit:mm)


●PRL12-4D□

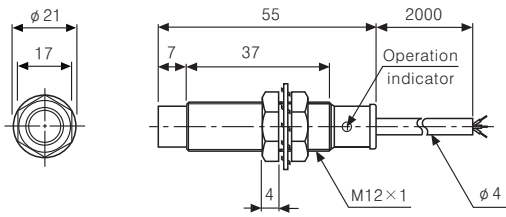


●PR12-2A□

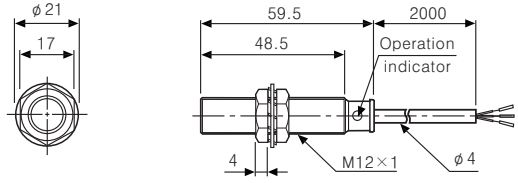

●PRL12-4A□

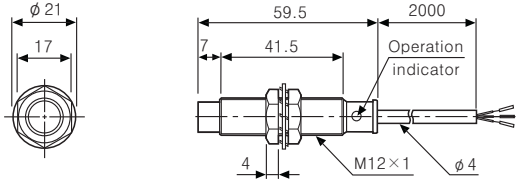


●PRL18-5D□

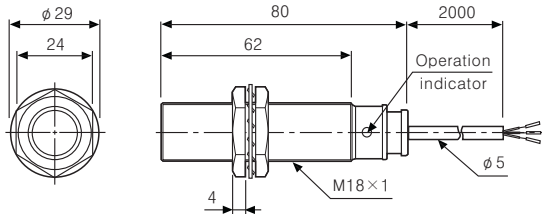


●PRL18-5A□

●PR18-5A□

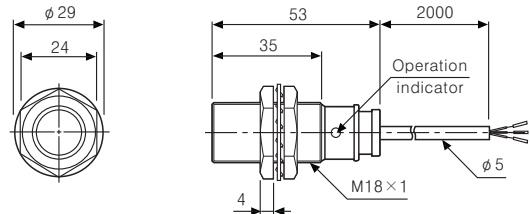


●PRL18-8D□

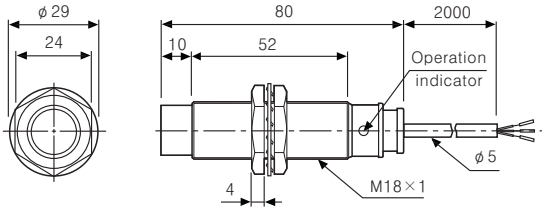


●PRL18-8A□

●PR18-8A□

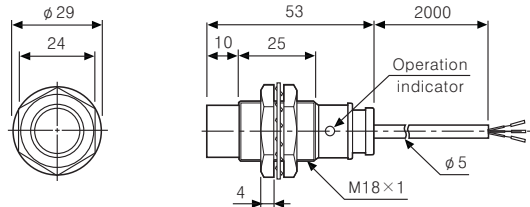


●PRL30-10D□

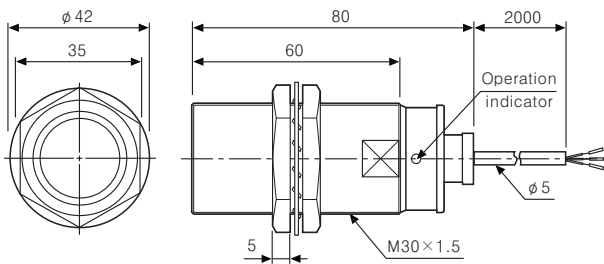


●PRL30-10A□

●PR30-10A□

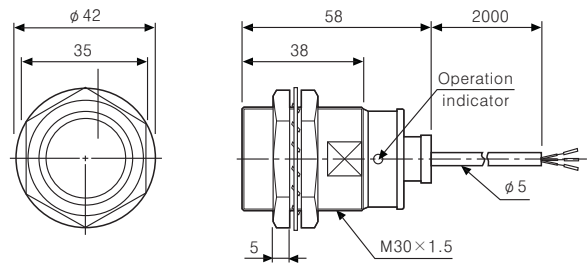


●PRL30-15D□

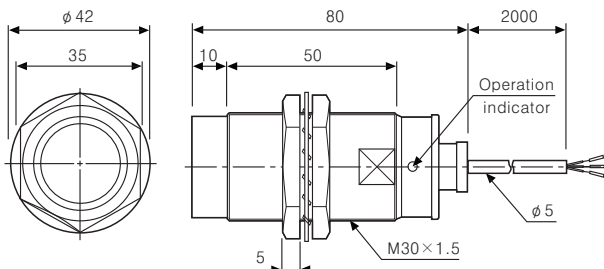

●PRL30-15A□


●PR30-15A□

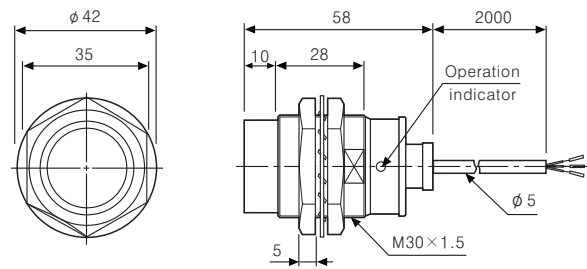



Cylindrical Type Proximity Sensor

Control output diagram


DC 2-wire type

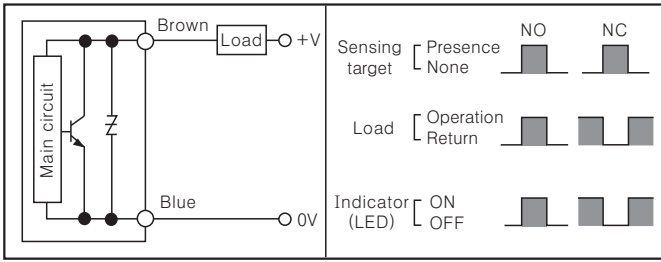

DC 3-wire type

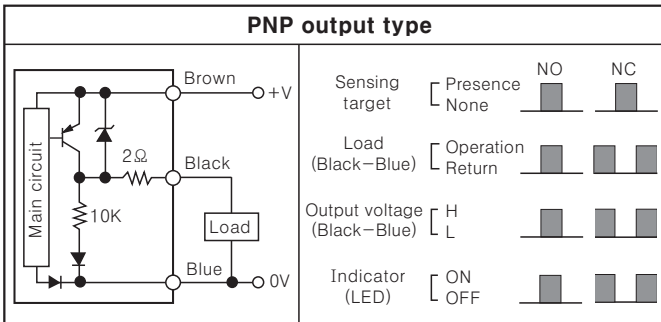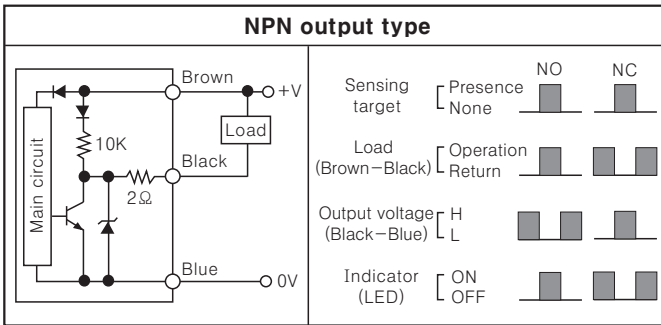


AC 2-wire type

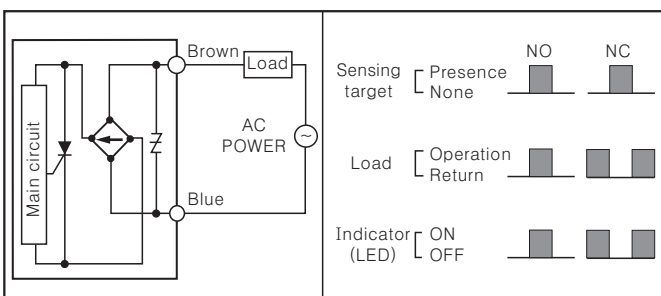


Connections

DC 2-wire type

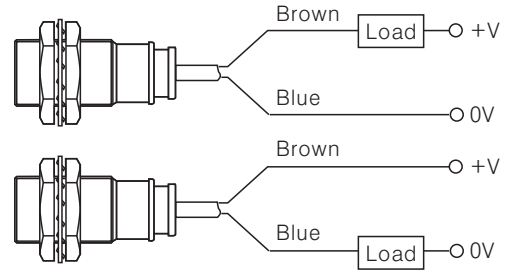


※ The load can be connected to either wire.

DC 3-wire type

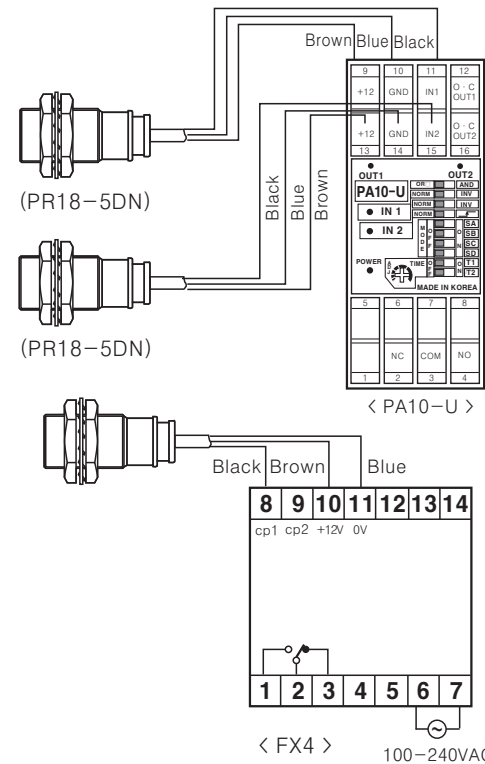

AC 2-wire type

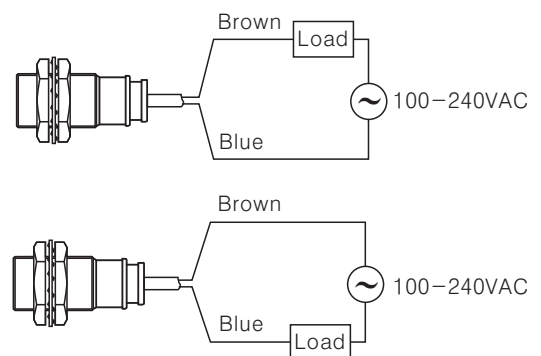


※ The load can be connected to either wire.

- (A) Photo electric sensor
- (B) Fiber optic sensor
- (C) Door/Area sensor
- (D) Proximity sensor**
- (E) Pressure sensor
- (F) Rotary encoder
- (G) Connector/Socket
- (H) Temp. controller
- (I) SSR/Power controller
- (J) Counter
- (K) Timer
- (L) Panel meter
- (M) Tacho/Speed/Pulse meter
- (N) Display unit
- (O) Sensor controller
- (P) Switching power supply
- (Q) Stepping motor & Driver & Controller
- (R) Graphic/Logic panel
- (S) Field network device
- (T) Production stoppage models & replacement

PR Series

■ Proper usage


○ Load connections

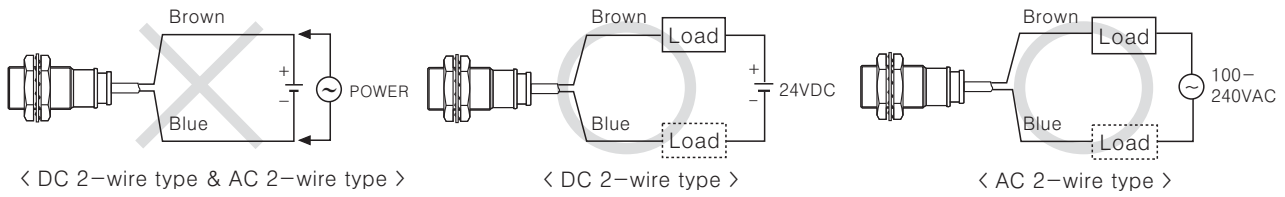

When using DC or AC 2-wire type proximity sensor, the load must be connected, otherwise internal components may be damaged. The load can be connected to either wire.

○ In case of the load current is small

● AC 2-wire type

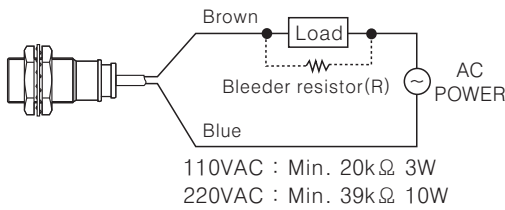


It may cause return failure of load by residual voltage. If the load current is under 5mA, please make sure the residual voltage is less than the return voltage of the load by connecting a bleeder resistor in parallel with the load as shown in the diagram.

$$R = \frac{V_s}{I} \text{ (}\Omega\text{)} \quad P = \frac{V_s^2}{R} \text{ (W)}$$

[I: Action current of load, R: Bleeder resistance, P: Permissible power]

● DC 2-wire type

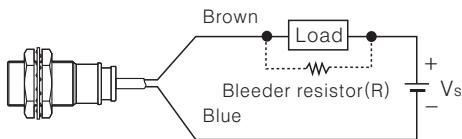


Please make the current on proximity sensor smaller than the return current of load by connecting a bleeder resistor in parallel. *W value of Bleeder resistor should be bigger for proper heat dissipation.

$$R = \frac{V_s}{I_o - I_{off}} \text{ (}\Omega\text{)} \quad P = \frac{V_s^2}{R} \text{ (W)}$$


[Vs : Power supply, Io : Min. action current of proximity sensor
Ioff : Return current of load, P : Number of Bleeder resistance watt]

○ Mutual-interference & Influence by surrounding metals

When several proximity sensors are mounted close to one another a malfunction of the may be caused due to mutual interference. Therefore, be sure to keep a minimum distance between the two sensors as below chart indicates.

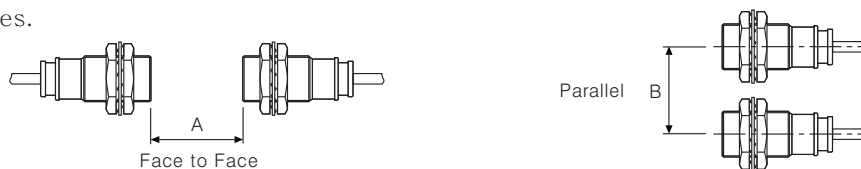

When sensors are mounted on metallic panel, it is required to protect the sensors from being affected by any metallic object except target. Therefore, be sure to provide a minimum distance as below chart indicates.

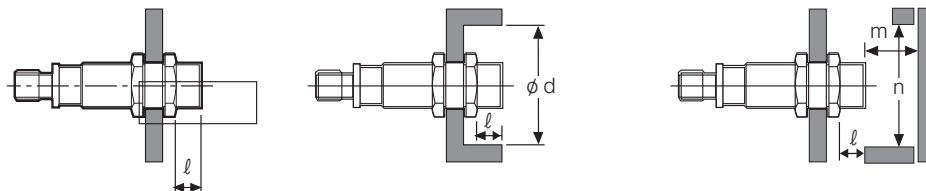

(Unit:mm)

| Model | PR08-1.5D□ PRT08-1.5D□ | PR08-2D□ PRT08-2D□ | PR(T)12-2D□ PRS12-2D□ PR12-2A□ | PR(T)12-4D□ PRS12-4D□ PR12-4A□ | PR(T)18-5D□ PRL18-5D□ PR18-5A□ PRL18-5A□ | PR(T)18-8D□ PRL18-8D□ PR18-8A□ PRL18-8A□ | PR(T)30-10D□ PRL30-10D□ PR30-10A□ PRL30-10A□ | PR(T)30-15D□ PRL30-15D□ PR30-15A□ PRL30-15A□ |
|-------|---------------------------|-----------------------|--------------------------------------|--------------------------------------|---|---|---|---|
| A | 9 | 12 | 12 | 24 | 30 | 48 | 60 | 90 |
| B | 16 | 24 | 24 | 36 | 36 | 54 | 60 | 90 |
| l | 0 | 8 | 0 | 11 | 0 | 14 | 0 | 15 |
| phi d | 8 | 24 | 12 | 36 | 18 | 54 | 30 | 90 |
| m | 4.5 | 6 | 6 | 12 | 15 | 24 | 30 | 54 |
| n | 12 | 24 | 18 | 36 | 27 | 54 | 45 | 90 |